


## DIN FTTX Box with Pigtail

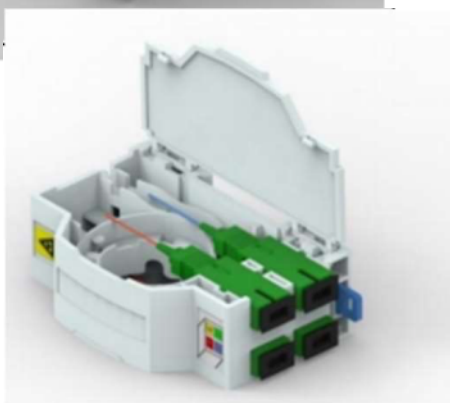

### Description

Indoor DIN rail mounted fiber optic terminal box is used for fiber connection and distribution. It is made of ABS-PC material. It's light and suitable to use for 1,2,4 fibers, mountable on standard 35mm DIN rail in electric, communication cabinets and other environments. It is suitable for connecting SCapc simplex adapters. Easy to install and with a compact design, the box allows the user to connect up to 4 fibers.

### Features

- Light weight
- Secure and protected connections
- Two box versions allow 1-2 or 1-4 fibers
- Integrated splice holders
- Mounts to standard 35 mm DIN rail

### Applications

\*FTTX access \*CATV Network \*Lan Network

### Technical Specifications

|                       |                                                     |
|-----------------------|-----------------------------------------------------|
| Number of Fibers      | 1, 2, 4                                             |
| Fiber Type            | G657A2                                              |
| Adapter Type          | SCapc Simplex                                       |
| Dimension             | 90 L x 60 W x 20 D mm (3.54" L x 2.36" W x .787" D) |
| Optical Performance   | IL < 0.3 dB, RL ≥ 60 dB (APC)                       |
| Degree of Protection  | IP40 / IK07 / UL94 V0                               |
| Material              | ABS-PC                                              |
| Operating Temperature | -10°C - 60°C                                        |

### Ordering Information

| Description                     | Part #    |
|---------------------------------|-----------|
| Din Rail Box, SCapc, 1F Pigtail | P97-21448 |
| Din Rail Box, SCapc, 2F Pigtail | P97-21449 |
| Din Rail Box, SCapc, 4F Pigtail | P97-21450 |

